


# T8




BUCKLE FOLDING MACHINES

## Technical specifications



BUCKLE FOLDING MACHINES




# T8

| Technical Specifications                       |      | T8 – R                                                   |         |
|------------------------------------------------|------|----------------------------------------------------------|---------|
|                                                |      | mm                                                       | inch    |
| Pile height                                    | max. | 80                                                       | 3 1/8   |
| Infeed width                                   | min. | 200                                                      | 8       |
|                                                | max. | 780                                                      | 30 3/4  |
| Infeed length                                  | min. | 250                                                      | 9 3/4   |
|                                                | max. | 1,080                                                    | 42 1/2  |
| Grammage                                       | min. | 32 g/m² (depending on paper quality and folding pattern) |         |
|                                                | max. | 60 g/m² (depending on paper quality and folding pattern) |         |
| Product thickness at exit (thicker on request) | max. | 2                                                        | 5/64    |
| Folding length                                 | min. | 45                                                       | 1 25/32 |
| Number of buckle plates                        |      | 16                                                       |         |
| Fold roller diameter                           |      | 43.7                                                     | 1 3/4   |
| Slitter shaft diameter                         |      | 35                                                       | 1 3/8   |
| Speed                                          | min. | 30 m/min (98 fpm)                                        |         |
|                                                | max. | 160 m/min (525 fpm)                                      |         |
| Electrical supply                              |      | 3 x 400 V 50/60 Hz<br>3 x 220 V 50/60 Hz                 |         |
| Compressed air supply                          |      | 9 m³/h<br>6 bar                                          |         |

Technical Drawing Floorplan T8

Measurements: mm  
inch

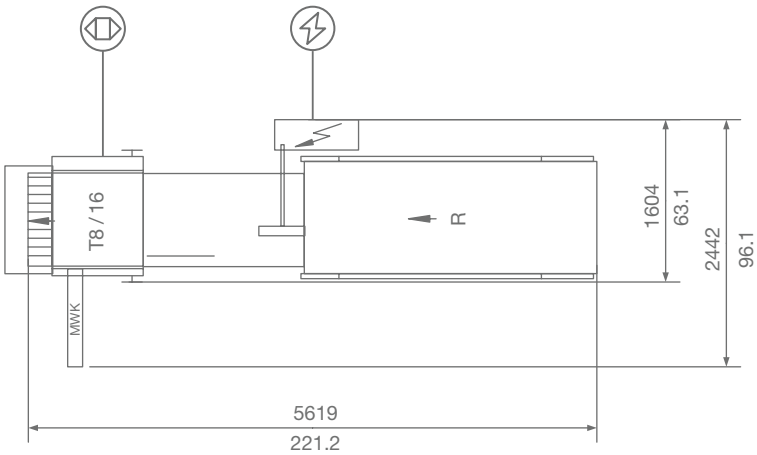

 Electrical supply

 Air supply

H+H GmbH & Co. KG  
Dunlopstrasse 45 / 33689 Bielefeld / Germany  
Phone +49 (0) 5205 / 7509-0 / [www.mbo-pps.com](http://www.mbo-pps.com)

Your contact partner

[INFO.HH@MBO-PPS.COM](mailto:INFO.HH@MBO-PPS.COM)

This brochure is subject to change without notice. The technical specifications vary depending upon paper quality.

06/2026\_v1

